



IMAGETEAM™ 3800PDF

Hand Held Linear Imager for PDF417

The IT3800PDF model delivers fast and accurate reading of PDF417 codes as well as all standard linear symbologies. The specially designed hardware and firmware are optimized for exceptional PDF417 performance in all types of scanning applications. PDF417 reading is accomplished by sweeping the scanner up or down over the code, quickly gathering, decoding, and outputting the data to the host system. The scanner ticks while collecting data, providing instant user feedback on performance. All symbologies are automatically discriminated with no reduction in decoding speed.

The IMAGETEAM™ 3800PDF is a high performance, hand held bar code scanner. The IT3800PDF uses linear imaging technology to set a new standard for hand held scanners by combining a bright, sharp aiming line with high resolution imaging to deliver exceptional reading performance.

Each decoded output scanner has the capability to connect as a keyboard wedge, use the serial port, output non decoded laser compatible signals, or operate in wand emulation mode. The IT3800PDF connects to all popular PCs, Apple MAC, and portable data terminals. A non decoded mode can be used with external wedge decoders and portable terminals or other devices with decoding capability. Standard cables are used to reduce replacement expense.

The IT3800PDF is excellent in hand held scanning applications, such as retail point of sale and in-store inventory. It operates from a tabletop holder in manual trigger mode, or may be placed in an adjustable stand for automated operation. The IT3800PDF can be used indoors or outside in bright sunlight. Typical applications are retail point of sale, in-store inventory, document management, transaction processing of bar coded receipts, payment counter, outdoor sales kiosks, and reading of vehicle registrations.

Features & Benefits

PDF Decoding

Fast, accurate, economical PDF reading using an innovative laser feedback design.

Bright, Sharp and Focused Aiming Line

Easy to aim and scan codes in any lighting condition from darkness to full sunlight, tightly stacked bar code sheets, or small, high resolution labels.

Solid, Rugged Design

No moving parts inside and solid construction outside deliver years of reliable service in demanding work environments.

New Design

Attractive styling compliments most existing POS environments, while user comfort is enhanced by the smooth handle curves, soft molded grip area, and comfortable trigger.

Powerful, Flexible Architecture

Connects and interfaces to all major PCs and terminals easily and quickly with Windows® based programming tools or bar code programming menus.

Increased Reading Distances

Easily covers the full range of hand held scanning uses in point of sale and general purpose scanning applications.

Real World Reading Performance

Accommodates printer induced bar space variation, faded labels, short quiet zones, low contrast codes, dot matrix printing, and multipart forms with higher resolution, better optics, and improved decoding algorithms.

5 Year Warranty

Performance

Illumination: 630 NM Visible Red LED
Receiving Device: 3648 element linear imager

PDF417 Bar Codes 3:1 Aspect Ratio

Reading Distance	10 mil	15 mil
Minimum	3 in. 7.6 cm	3 in. 7.6 cm
Maximum	4.5 in. 11.4 cm	5 in. 12.7 cm

Skew Angle: ±30°
Pitch Angle: ±15°
Horizontal Velocity: 2 in. (5.1 cm) per second
Minimum Reflectance Difference: 40%
Scan Rate: Programmable to 270 scans per second
Decode Rate: Up to 270 decodes per second

Mechanical/Electrical

Dimensions

Length: 5.3 in. (13.5 cm)
Height: 6 in. (15.2 cm)
Width: 3.1 in. (7.9 cm)
Weight: 6.3 oz. (179.2 g)
Housing: Polycarbonate/ABS blend, UL 94V0
Power Requirements: 5Vdc ± 10% at scanner
Current Draw:


	Scanning	Standby	Low Power	In-Rush
@ 270 s/s	275mA	125mA	5 microA	400mA
@ 67 s/s	150mA	125mA	5 microA	400mA

Power Supply
Noise Rejection: Maximum 100mV peak to peak, 10 to 100 kHz

Environmental

Temperature

Operating: +32°F to +122°F (0°C to +50°C)
Storage: -4°F to 140°F (-40°C to +60°C)
Humidity: 0 to 95%
Mechanical Shock: Operational after 25 drops from 5 ft. (1.53 m) to concrete
Ambient Illumination: 0 - 70,000 lux
ESD Protection: Functional after 15kV discharge
Vibration: Withstands 5G peak from 20 to 300 Hz
Agency: FCC Class B, CE EMC Class B, CE Low Voltage Directive, IEC60825-1 LED Safety: Class 1, UL, cUL listed, TÜV
MTBF: per MIL-HDBK-217F Ground Benign exceeds 100,000 hours
Symbologies: PDF417, Codabar, Code 3 of 9 including PARAF, Interleaved 2 of 5, Code 2 of 5, Matrix 2 of 5, Code 11, Code 128, UPC, EAN/JAN, China Postal Code.
Interfaces: All popular PCs and terminals via keyboard wedge, keyboard replacement/direct connect, Apple ADB, USB, TTL Level Serial Wedge, TTL level RS-232, wand emulation mode, and includes (HHLC) non decoded laser compatible output.
Warranty: Five year factory warranty.

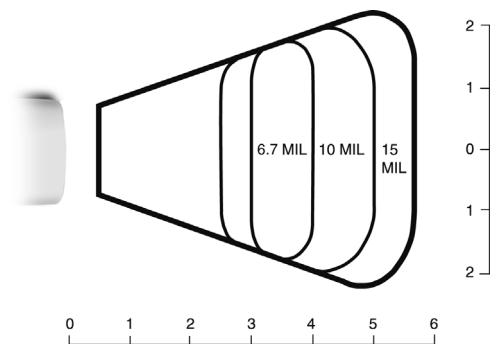

Typical reading zones on good quality bar codes

Worldwide Offices

Offices Serving North America

Skaneateles Falls, NY
 Tel: (315) 685-8945
 Fax: (315) 685-3172
 Charlotte, NC
 Tel: (704) 537-1444
 Fax: (704) 532-4191

Offices Serving Europe, Middle East, and Africa

Europe
 Tel: Int +31 (0) 40 24 24 486
 Fax: Int +31 (0) 40 24 25 672
 United Kingdom
 Tel: Int +44 (0) 1 925 240055
 Fax: Int +44 (0) 1 925 631280
 France
 Tel: Int +33 (0) 1 461 04111
 Fax: Int +33 (0) 1 461 04120

Germany

Tel: Int +49 (0) 7 477 151377
 Fax: Int +49 (0) 7 477 151378

Offices Serving Asia and the Pacific Rim

Hong Kong
 Tel: Int +852 2511 3050/2511 3132
 Fax: Int +852 2511 3557

Japan

Tel: Int +813 52127392
 Fax: Int +813 32617372

Offices Serving Latin America

Naples, Florida
 Tel: (941) 263-7600
 Fax: (941) 263-9689